


# BLÜCHER® ROOF DRAIN

## WITH PREMOUNTED BITUMEN




GRAVITY & SIPHONIC 403.x0x.xxx

DE MONTAGEANLEITUNG  
DK MONTERINGSVEJLEDNING  
ENG INSTALLATION INSTRUCTIOS  
FI ASENNUSOHJEET  
FR INSTRUCTIONS DE MONTAGE  
NO MONTERINGSANVISNING  
SE MONTERINGSVÄGLEDNING

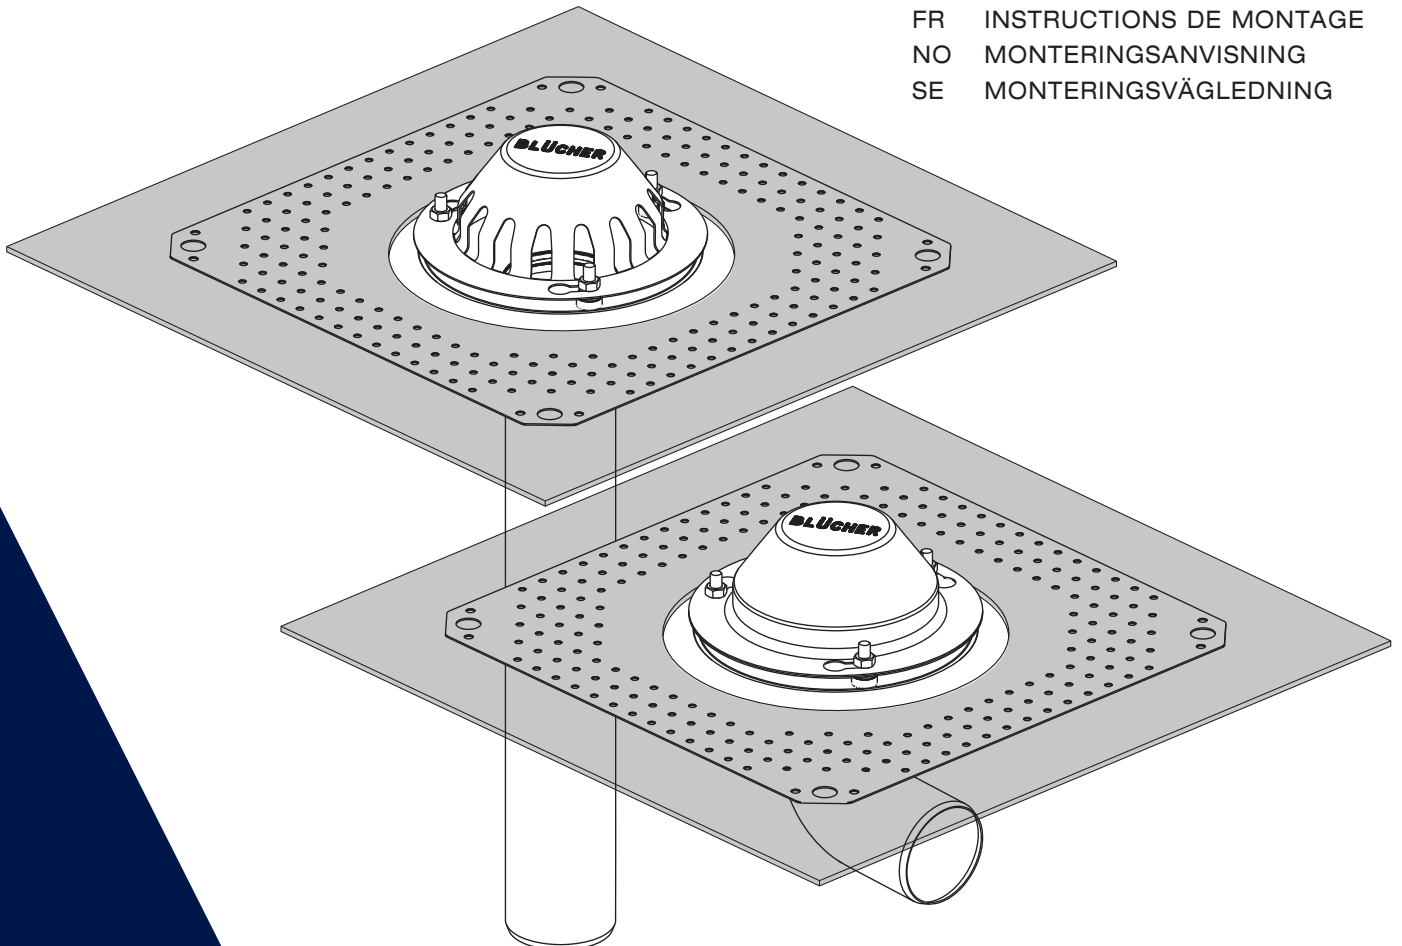

GRAVITY




403

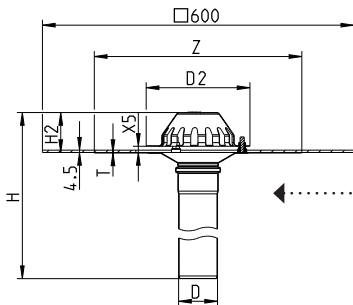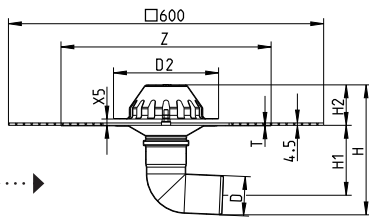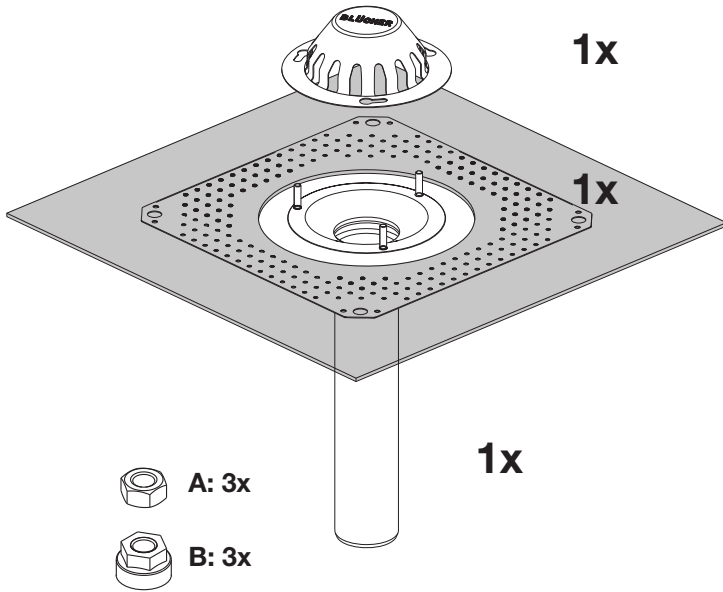

Type no.	D	D2	H	H1	H2	Z	X5	T
403.100.050	50	Ø200	220	118	77	□ 400	12	1
403.100.075	75	Ø200	247	133	77	□ 400	12	1
403.100.110	110	Ø200	283	151	77	□ 400	12	1
403.104.050	50	Ø200	495	-	77	□ 400	12	1
403.104.075	75	Ø200	495	-	77	□ 400	12	1
403.104.110	110	Ø200	495	-	77	□ 400	12	1
403.106.050	50	Ø200	695	-	77	□ 400	12	1
403.106.075	75	Ø200	695	-	77	□ 400	12	1
403.106.110	110	Ø200	695	-	77	□ 400	12	1


SIPHONIC

403

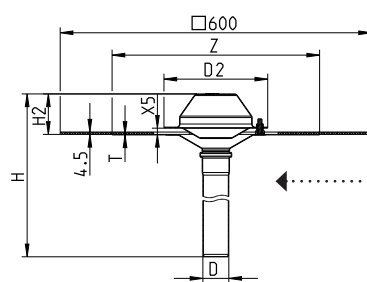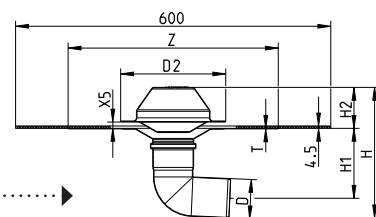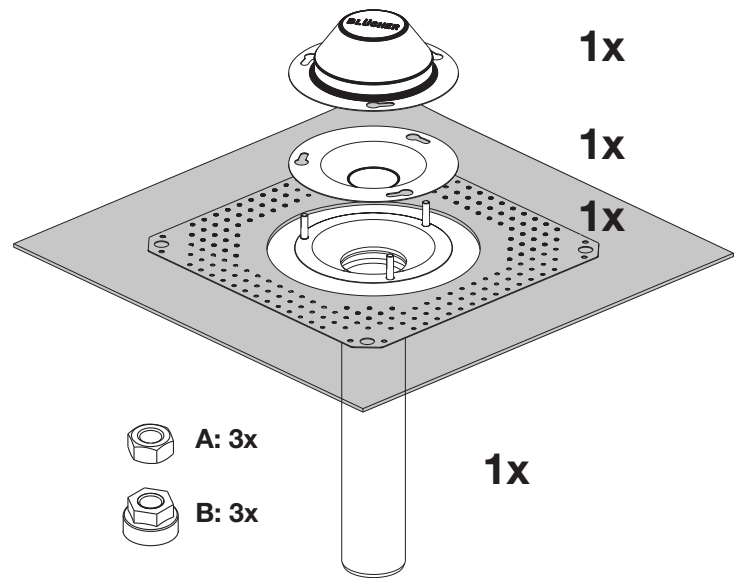


Type no.	D	D2	H	H1	H2	Z	X5	T
403.200.040	40	Ø200	210	112	78	□ 400	12	1
403.200.050	50	Ø200	221	118	78	□ 400	12	1
403.200.075	75	Ø200	248	133	78	□ 400	12	1
403.200.110	110	Ø310	297	151	85	□ 400	12	1
403.204.040	40	Ø200	496	-	78	□ 400	12	1
403.204.050	50	Ø200	496	-	78	□ 400	12	1
403.204.075	75	Ø200	496	-	78	□ 400	12	1
403.204.110	110	Ø310	503	-	85	□ 400	12	1
403.206.040	40	Ø200	696	-	78	□ 400	12	1
403.206.050	50	Ø200	696	-	78	□ 400	12	1
403.206.075	75	Ø200	696	-	78	□ 400	12	1
403.206.110	110	Ø310	703	-	85	□ 400	12	1

1

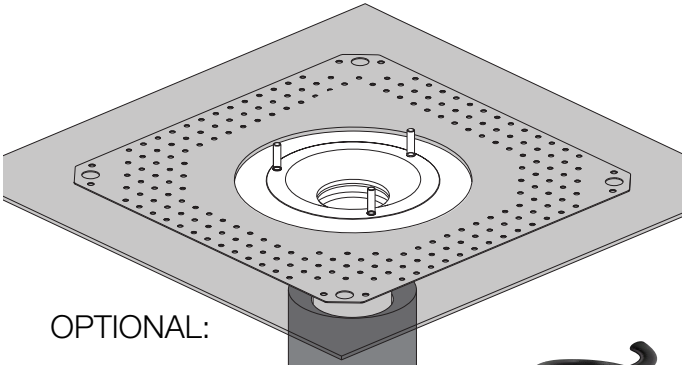


OPTIONAL:

400.001.XXX  
INSULATION

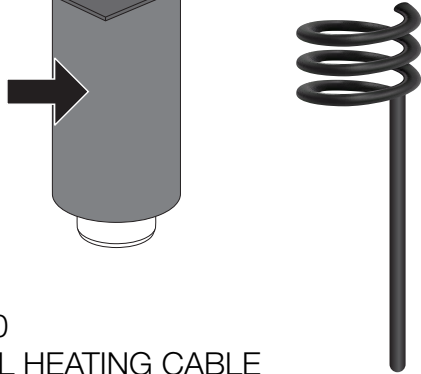


400.000.000  
ELECTRICAL HEATING CABLE


2

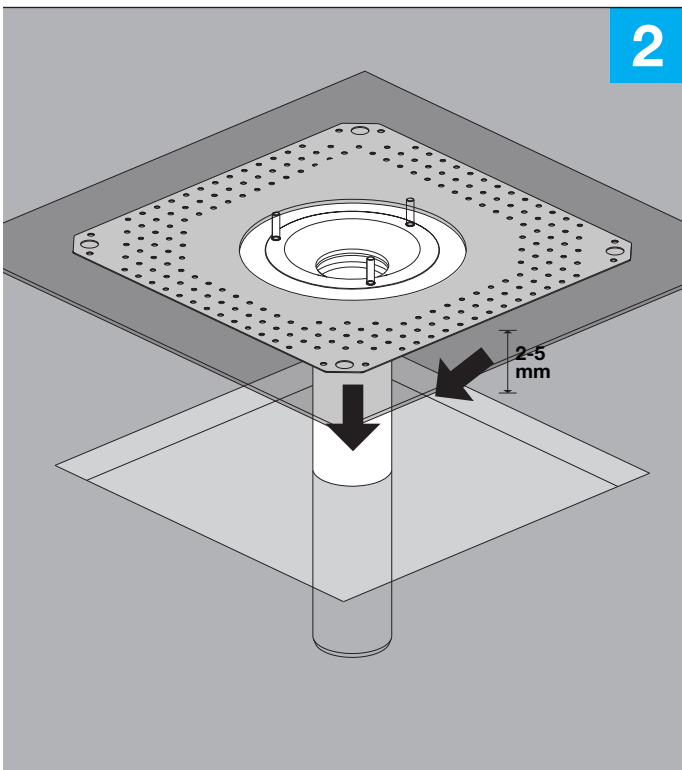


3

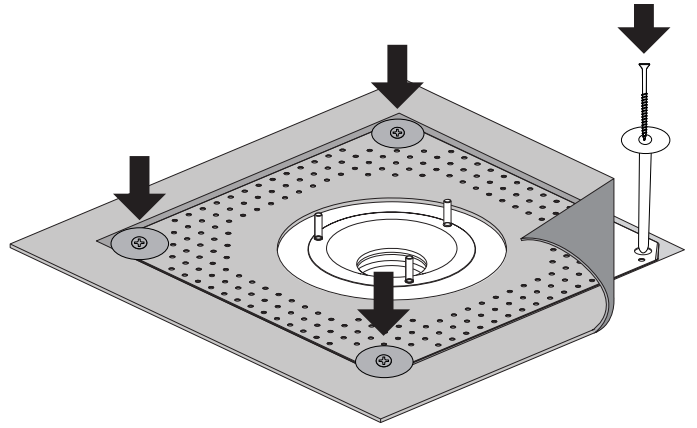


3A

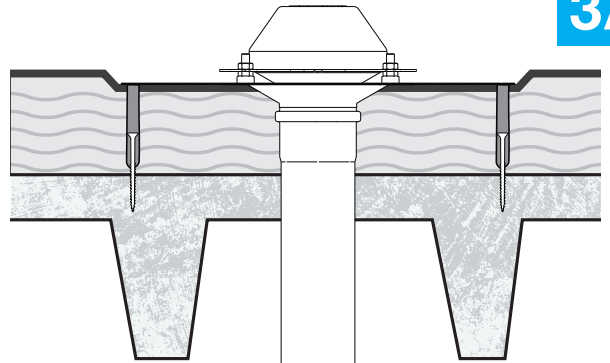


3B


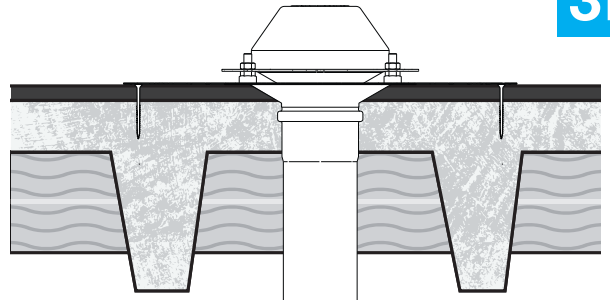



3C

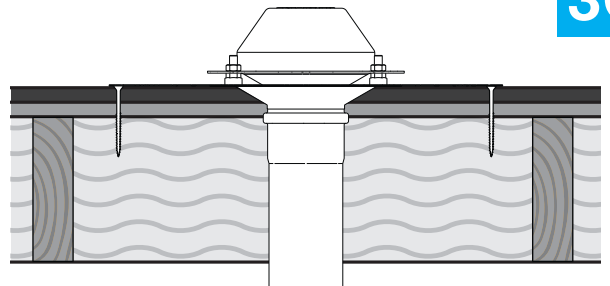

3D

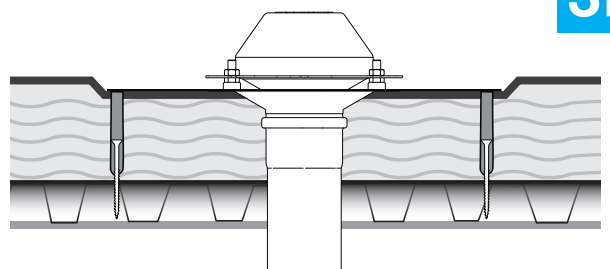

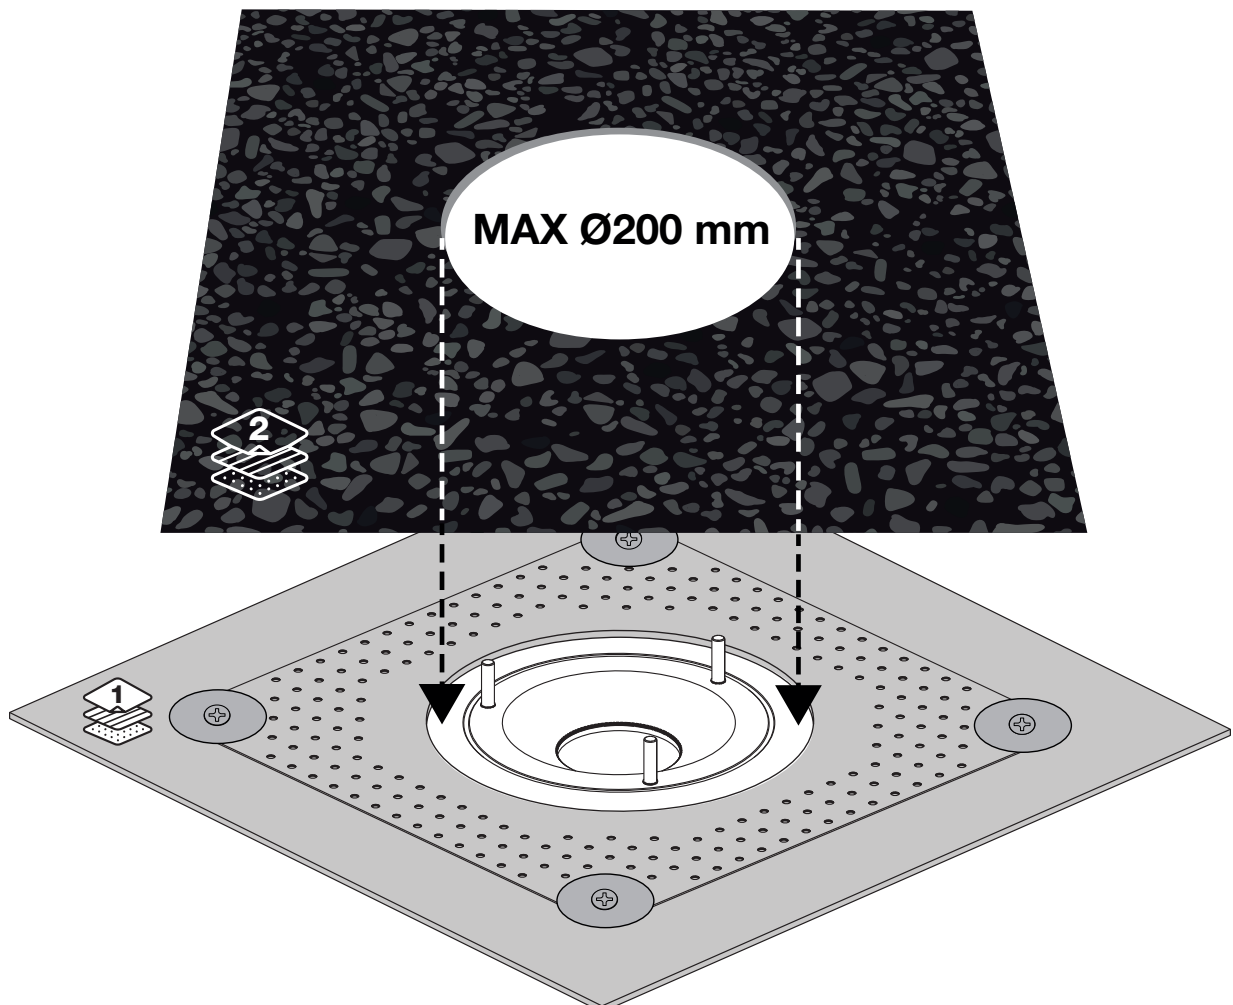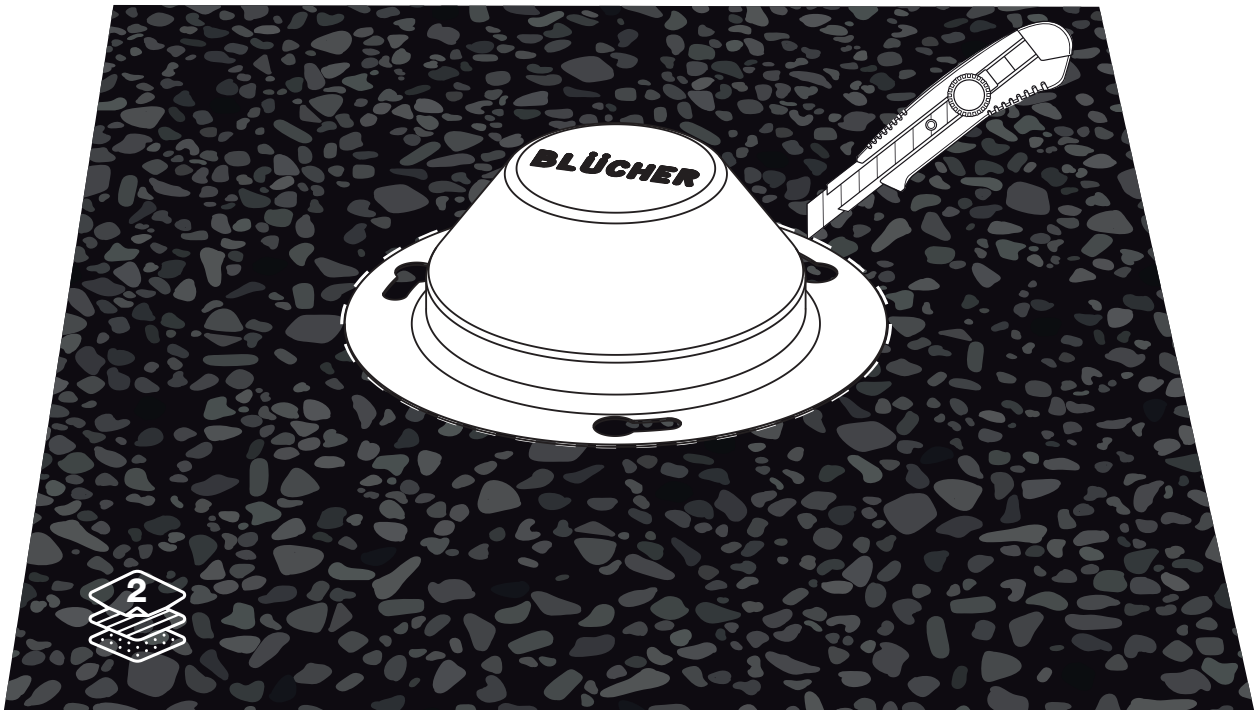


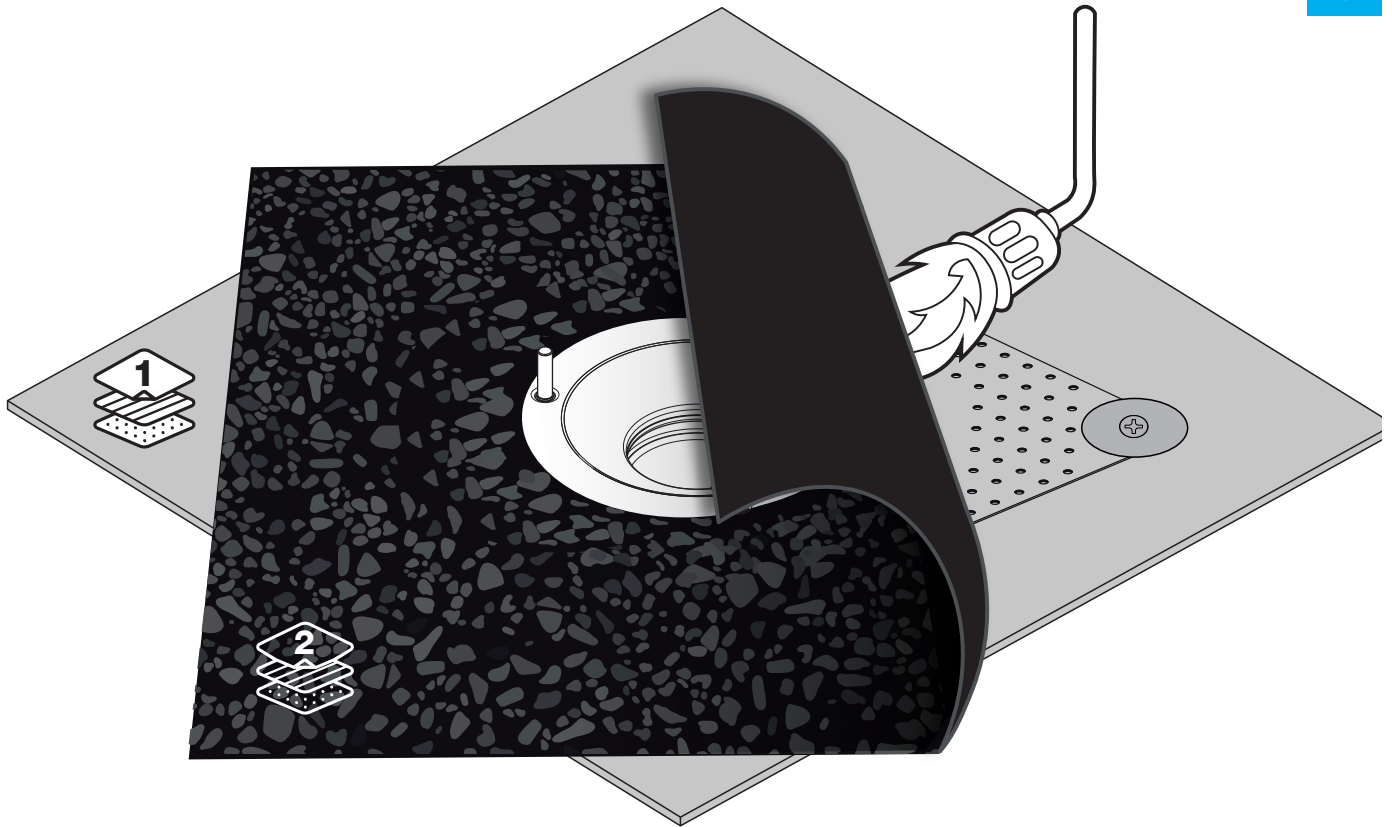


7

SIPHONIC

8A

3x - 12 Nm

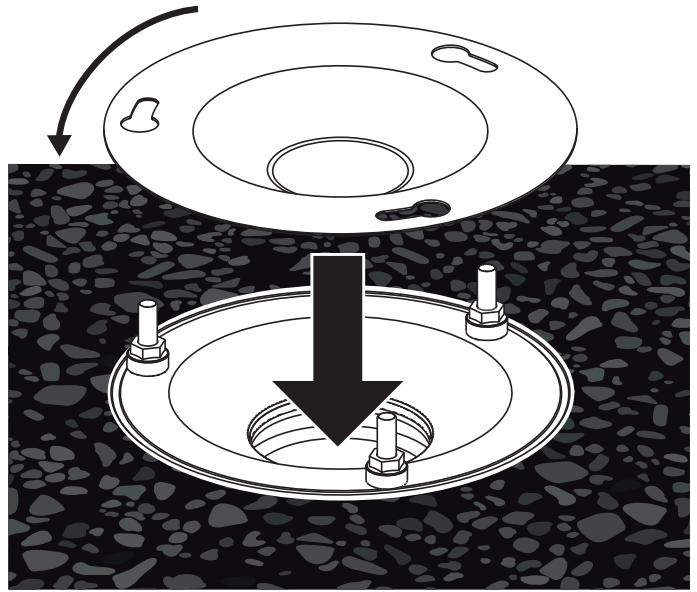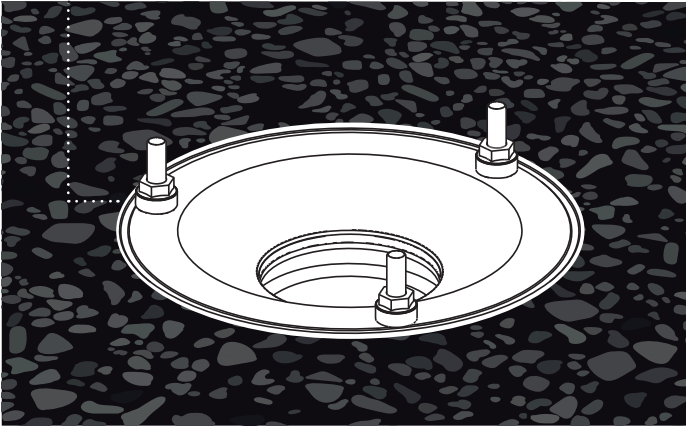


SIPHONIC



9A

SIPHONIC

10A

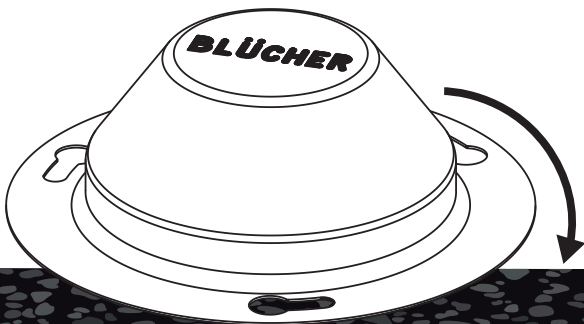


3x - 12 Nm

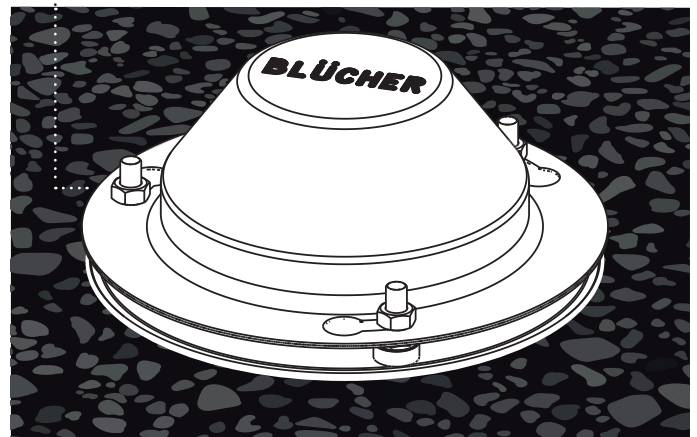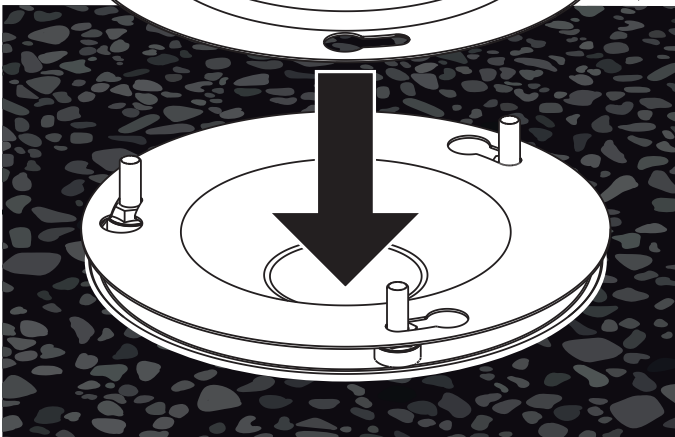


GRAVITY

8B

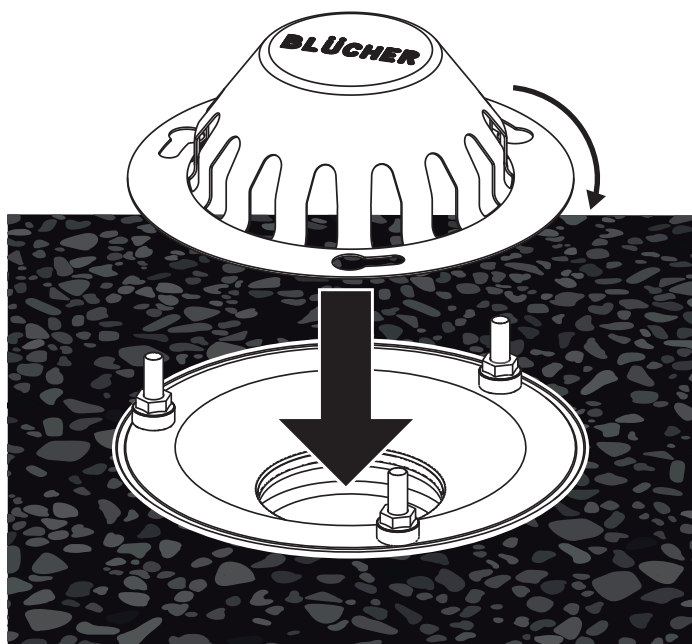

GRAVITY

9B

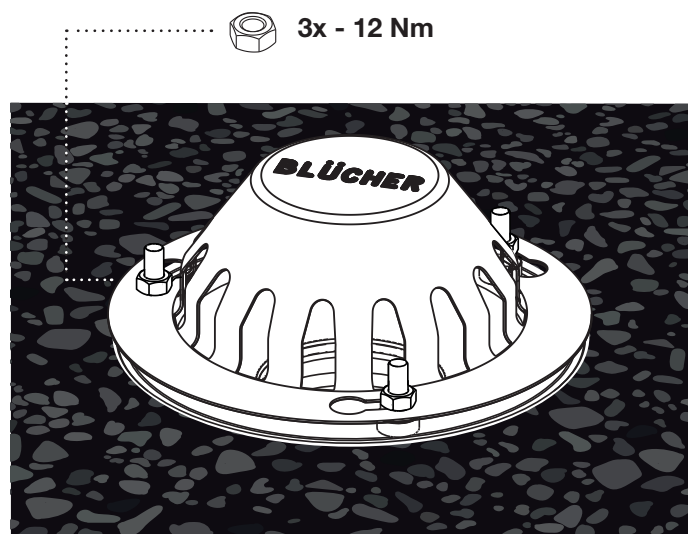

**BLÜCHER®**

**A WATTS Brand**

Tel.: +45 99 92 08 00 · [BLUCHER.com](http://BLUCHER.com)